


**DITHERM  
MTW**

+300°C  
-40°C

**INOX**

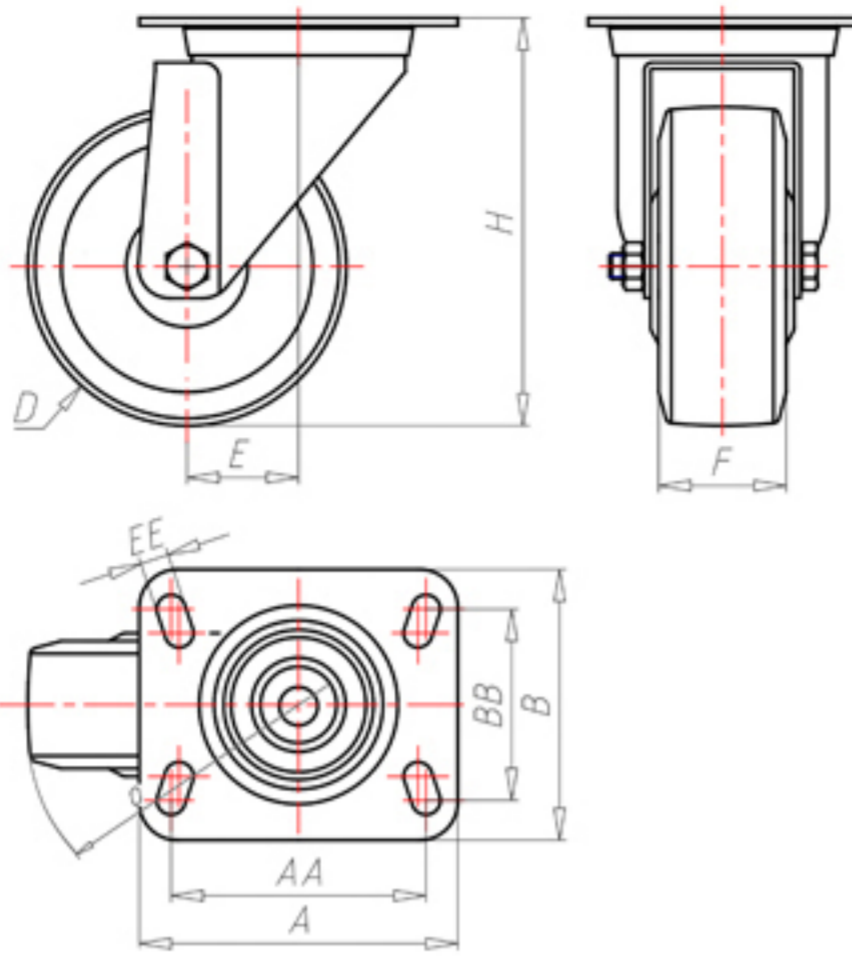

|  |       |         |
|--|-------|---------|
|  | D     | 150     |
|  | F     | 45      |
|  | H     | 181     |
|  | AxB   | 135x110 |
|  | AAxBB | 105x80  |
|  | EE    | 11      |
|  | E     | 52      |
|  | O     | 120     |
|  | LC    | 300     |



Code for plain bore wheel

**MGX150**



Code for wheel with coated bush

-



Code for wheel with double BT self-lube bush

-



Code for wheel with double HT ball bearing

-



Code wheel with double sintered bronze bush

**MGX150BS**

